

**TACFLEX POLYAMIDE SPIRAL CONDUITS**

**TECHNICAL DETAILS**


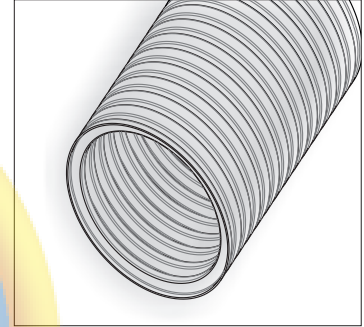
Material	: Polyamide PA6 V2
Color	: Grey (RAL7031) black (RAL9005) * Orange or any other color available on request
Temperature range	: -40 °C + 120 °C
Flammability class	: UL94 V2

**Properties**

High fatigue life  
 High impact strength  
 Halogen free  
 Self extinguishing  
 High abrasion resistance  
 High UV resistance (black)  
 Full-shrink packing

# PLASTIC SPIRAL CONDUITS

PA 6


**POLYAMİD SİRAL BORU**

Hammaddesi	: Polyamid PA6 V2
Renk	: RAL 7031 (Gri) RAL 9005 (Siyah)
Çalışma sıcaklığı	: -40 °C + 120 °C
Kullanım alanları	: Mekanik ve ekipman cihaz bağlantılarında makine, matbaa, otomotiv, lokomotif, tramvay, gemi otomatik makinaları, endüstriyel tesis montajlarında, aydınlatma ve elektrik pano montajlarında kullanılmaktadır.


**PA6 SPIRAL CONDUITS**

Nominal Diameter	Gray Code	Black Code	d Ø mm.	d1 Ø mm.	Roll Length mt.
	■ RAL 7031	■ RAL 9005			
7	OGPA 7	OSPA 7	6,5	10	100
8,5	OGPA 8,5	OSPA 8,5	8,5	12	100
9	OGPA 9	OSPA 9	10	13	100
11	OGPA 11	OSPA 11	12	15,8	50
13,5	OGPA 13,5	OSPA 13,5	14,2	18,4	50
16	OGPA 16	OSPA 16	16,5	21,2	50
21	OGPA 21	OSPA 21	23,5	28,4	50
29	OGPA 29	OSPA 29	29	34,5	25
36	OGPA 36	OSPA 36	36	42,5	25
48	OGPA 48	OSPA 48	48	54,5	25

PRODUCT RANGE OVERVIEW

Halogen free