


Braco earth tags are made out of brass sheets and punched to the required sizes and are suitable for all sizes of cable glands. Electrical continuity is normally achieved via the screwed entry into metal boxes. For clearance Hole entry situations it is essential to obtain direct metal-to-metal contact between the gland, earth tag and the enclosure. These are used to ensure earth continuity between the gland and the equipment.



Earth Tags

Cat No.	Dia A (mm)	Dia B (bolt Hole)	Thickness (mm)	Short Circuit Rating KA
ET -20	20.3	6.7	1.5	4.4
ET -25	25.8	6.7	1.5	4.0
ET -32	32.4	12.4	1.5	6.2
ET -40	40.4	13.2	1.5	9.8
ET -50	51.2	13.2	1.5	11.4
ET -63	63.9	13.2	1.5	12.0
ET -75	76.6	13.2	1.5	14.3

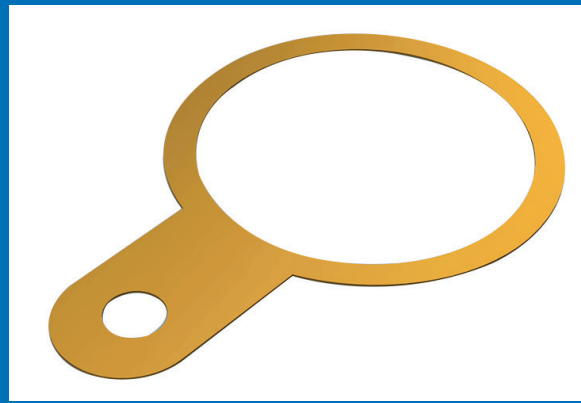