







TARGET



Authorized Dealer & Distributor

RUJUTA ENTERPRISES

Office Address : 205,2nd Floor,Anand Bhuvan,17,Babu Genu Road,Princess street,M-400002.

Contact : 22050661, 39567213 , 66351421 ,

Nilesh Sanghvi 9820825440 , Karan Sanghvi 9769789105 , Ashvin Sanghvi 9222286068

All rights reserve to change in design,model ,dimension and material are with manufacturer. Colours shown in the picture may not match with the actual colours.

Trusted Name in indication Industry



Description	Model No.
Flush Mounting	72-EHS
Base Mounting	72-EHS-B
Wall Mounting	72-EHS-W



Volume control & Acceptance version available on request



Electronic Hooter with 10mm LED	144-EHL-S3
---------------------------------	------------



Housing : Cast Aluminium
Gong Size : 4"/6"/9"/12"
Gong : M. S. with Powder Coating
Input Voltage : 230V AC

Gong Size	Model No.
4"	4-HGB
6"	6-HGB
9"	9-HGB
12"	12-HGB



Housing : Cast Aluminium
Cover : Plastic
Size : 4" (Base Mounting 95mm approx.)
Input Voltage : 110V/230V AC

Description	Model No.
Mini Base Mounting	4-RBM

Standard Voltage	12	24	48	110	230	415
For AC	A 1	A 2	A 3	A 4	A 5	A 6
For DC	D 1	D 2	D 3	D 4	D 5	-

Add Suffix to above model

Housing : M. S. with Powder Coating
Audible Range : 0.5km
Mounting : Base
Tone : Siren
Housing : Acrylonitrile Butadiene Styrene
Glass : Polycarbonate
Glass Colour :
Revolving : LED Version
Input Voltage : 12V /24/30V/48/50V DC/110V/230V AC

**Please Confirm availability of Glass Colour*

Description	Model No.
0.50km	ESTV-50-LR




Housing : Cast Aluminium
Cover : Plastic
Size : Base Mounting (52mm x 52mm approx.)
Input Voltage : 110V/230V AC

Model No.	
2-MB	






Housing : M. S. with Powder Coating
Audible Range : 107 db Approx.(at 1 meter)
Mounting : Base/Wall
Tone : Intermittent/Siren
Glass : Polycarbonate
Glass Colour : 
Revolving : LED Version
Input Voltage : 12V/24V/30V/48/50V/110V/230V AC or DC

Hooter Size:144mm x 144mm

Flasher Type	Tone	Cabinet Colour	Model No.
LED	Intermittent	Black	144-EHS-LR
LED	Siren	Black	144-EHS-S3-LR

**Please Confirm availability of Glass Colour*



Housing : M. S. with Powder Coating
Audible Range : 107 db Approx.(at 1 meter)
Mounting : Base/Wall
Tone : Intermittent/Siren
Glass : Styrene Acrylonitrile
Glass Colour : 
Flasher : LED Version
Input Voltage : 12V/24/30V/48/50V DC/110V/230V AC or DC

Hooter Size:144mm x 144mm

Flasher Type	Model No.
LED	144-EHS-CFLL
LED	144-EHS-S3 CFLL

Electronic Hooter with Revolving Light

Housing : Acrylonitrile Butadiene Styrene
Audible Range : 100 db Approx.(at 1 meter)
Mounting : Base/Wall
Tone : Black Cabinet-Intermittent / Red Cabinet- Siren
Glass : Polycarbonate
Glass Colour : 
Revolving : LED Version
Input Voltage : 12V/24V DC/30V/48/50V DC/110V/230V AC or DC


Hooter Size:96mm x 96mm

Flasher Type	Tone	Cabinet Colour	Model No.
LED	Intermittent	Black	96-EHS-LR
LED	Siren	Red	96-EHS-S3-LR

**Please Confirm availability of Glass Colour*



Electronic Hooter with Flasher

Housing : Acrylonitrile Butadiene Styrene
Audible Range : 100 db Approx.(at 1 meter)
Mounting : Base/Wall
Tone : Black Cabinet-Inrermittent /Red Cabinet -Siren
Glass : Styrene Acrylonitrile
Glass Colour : 
Flasher : LED Version
Input Voltage : 12V/24/30V/48/50V DC/110V/230V AC or DC

Hooter Size:96mm x 96mm

Flasher Type	Cabinet	Model No.
LED	Black	96-EHS-CFLL
LED	Red	96-EHS-S3-CFLL



Detached Siren

Housing : M. S. with Powder Coating
Cabinet Size : 225mm x 200mm
Tone : Siren
Speaker : P.A.
Audible Range : 0.5km,1km
Input Voltage : 12V/24V DC/110V/230V AC

Description	Model No.
0.50km	ESTVD-50
1.00km	ESTVD-100



Electronic Siren

Housing : M. S. with Powder Coating
Tone : Intermittent / Siren
Audible Range : 0.5 km
Mounting : Base
Input Voltage : 12V/24V DC/110V/230V AC

Description	Model No.
0.50 km	ESTV-50

Electronic Circuit with Detachable Speaker

Housing : Acrylonitrile Butadiene Styrene
Cabinet Size : 113mm x 113mm
Tone : Black Cabinet- Intermittent / Red Cabinet-Siren
Speaker : P.A or Target
Input Voltage : 12V/24/30V/48/50V DC/110V/230V AC or DC

Description	Model No.
113mm x 113mm	DEH
96mm Speaker	Economy



Electronic Hooter/Siren (Hivol)

Housing : M. S. with Powder Coating
Cabinet Size : 213mm X 137mm
Tone : Intermittent / siren
Audible Range : 113db approx.(at 1 meter)
Input Voltage : 12V/24V/48V DC/110V/220V AC

Description	Tone	Model No.
213mm x 137mm	Intermittent	HVH
213mm x 137mm	Siren	HVS





Revolving Light with or without Buzzer (LED)

Housing : Acrylonitrile Butadiene Styrene
Glass : Polycarbonate
Glass Colour : ■ ■ ■ ■
Audible Range : 70 db approx.(at 1 feet)
Input Voltage : 12V/ 24V DC/110V/230V AC

Revolving	Model No.
LED Type	LR
LED Type with Buzzer	LRB

*Please Confirm availability of Glass Colour



22.5mm Ø Indicating Lamp with or without Buzzer

Housing : Acrylonitrile Butadiene Styrene
Glass : Styrene Acrylonitrile
Glass Colour : ■ ■ ■ ■
Audible Range : 70 db approx.(at 1 feet)
Input Voltage : 12V/ 24V DC/110/230V AC or DC

Description	Model No.
Buzzer	RB
Steady Lamp	SR
Flasher Lamp	FR
Steady Lamp + Buzzer	SRB
Flasher Lamp + Buzzer	FRB

Tower Light (LED) Steady + Flasher + Buzzer

Housing : Acrylonitrile Butadiene Styrene
Glass : Styrene Acrylonitrile
Glass Colour : ■ ■ ■ ■
Audible Range : 70 db approx.(at 1 feet)
Input Voltage : 12V/24V DC/110/230V AC

Steady		Steady+Buzzer	
Stack	Model No.	Stack	Model No.
1	1-LTSS	1	1-LTSSB
2	2-LTSS	2	2-LTSSB
3	3-LTSS	3	3-LTSSB
4	4-LTSS	4	4-LTSSB
5	5-LTSS	5	5-LTSSB


Steady+Flasher		Steady+Flasher+Buzzer	
Stack	Model No.	Stack	Model No.
1	1-LTS	1	1-LTSB
2	2-LTS	2	2-LTSB
3	3-LTS	3	3-LTSB
4	4-LTS	4	4-LTSB
5	5-LTS	5	5-LTSB



LED Flasher with or without Buzzer

Housing : Acrylonitrile Butadiene Styrene
Glass : Styrene Acrylonitrile
Glass Colour : ■ ■ ■ ■
Audible Range : 70 db approx.(at 1 feet)
Input Voltage : 12V/ 24V/48V DC/110V/230V AC


Flasher	Model No.
LED	CFLL
LED with Buzzer	CFLLB

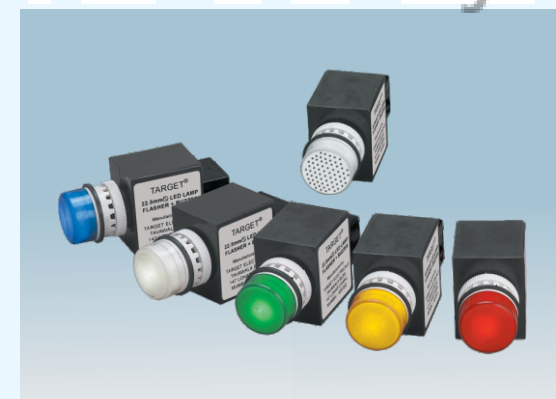

Busbar Indication

Housing : M. S. with Powder Coating
Flaser Housing : Acrylonitrile Butadiene Styrene
Glass : Styrene Acrylonitrile
Glass Colour : Red,Amber,Blue
Input Voltage : 230VAC

Description	Model No.
Busbar Indication	BI

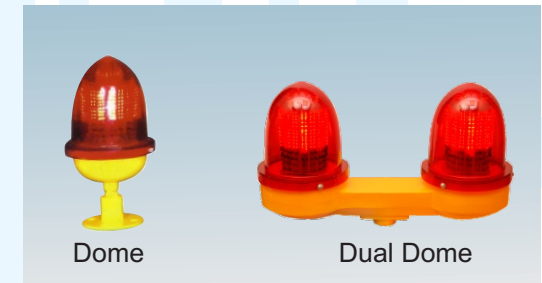

Aviation Light /Obstruction Light (Dome)

Housing : Pressure Cast
Glass : Polycarbonate

* LED based obstruction lights utilize 90% less power than an equivalent incandescent
 * Typical power consumption-@230VAC-15W.
 * Weather/Corrosion resistant lamp assembly and housing.
 * Self contained writing compartment eliminate additional boxes
 * Can be used as steady or flashing lights.
 * Nos. of LEDs used-306 nos.
 * Available in 12-24V DC, 110V AC and 230V AC (50/60/HZ) versions
 * Automatic on & off using Photo switch version available.

Description	Model No.
Dome Light	Dome
Dome Light with Photo Sensor	Dome PS
Dual Dome	Dual Dome
Dual Dome with Photo Sensor	Dual Dome PS



Electronic Hooter with Tower Light

Housing : Acrylonitrile Butadiene Styrene
Base Patty : M.S. Powder Coating
Audible Range : 100 db Approx. (at 1 Meter)
Mounting : Base/Wall
Tone : Black Cabinet- Intermittent / Red Cabinet- Siren
Glass : Styrene Acrylonitrile
Glass Colour : ■ ■ ■ ■
Input Voltage : 12V /24V DC/110V/230V AC

Hooter Size: 96mm x 96mm	
Model No.	
96-EHS-1-LTS	
96-EHS-2-LTS	
96-EHS-3-LTS	

Please Specify Hooter Sound with Flasher or Steady

Compact

Housing : Base & Top Powder coated Aluminum Casting
Glass : Polycarbonate
Input : 85V to 250V ACDC/ 24V to 80V ACDC/12V DC
Version : LED with Photo Sensor

Description	Model No.
Light with photo sensor	AL

