



**NEOTECH**<sup>TM</sup>

*The True Engineers*



**Office Address:** 14, Ground Floor, Tawawala Building,  
36, Pathakwadi, Lohar Chawl, Mumbai – 400002  
**Contact No:** 9082463426 , 8169580098  
**Mobile No:** 9820825440, 9769789105  
**Landline:** 022-44517539 Talkfree : \*7213  
**Website:** [www.rujutaent.com](http://www.rujutaent.com)



OUR ANSWER  
TO  
GLOBAL  
WARMING

JAINSON  
NEOTECH FANS  
PRICE LIST 2025

AC & DC COOLING FAN PRICE LIST

15<sup>th</sup> November, 2021.



**RUJUTA  
CORPORATION**

**NEOTECH™**

*The True Engineers*

It is our Pleasure to represent ourself as a “**NEOTECH™**” Group of Companies (Formerly known as “**Jainson**”) of the new millennium. **NEOTECH™** had started its industrial activity in the year 1996 on miniscal scale with the development of Pressure Switches for Air Compressors.

With rapid industrialization and automization, group has adopted latest technology to develop Tube Axial Fans. Backed up by excellent engineering know how, supported by German R&D, **NEOTECH™** has developed its core competence in Motor technology, constantly setting new standards in motor and fans technology, thus exceeding the ever growing specialized customer expectations and requirements.

Continuous support from the reputed customers and equal reciprocation by the group by way of introducing new products into the market.

It is a matter of pride that millions of our product Fans, Pressure Switches and Relays are being used by various industries & this has been possible due to our sincere effort to maintain quality standards from time to time to produce better product. Besides R&D Lab we have “In House Test Lab “Which is equipped with modern equipments required to test products parameters e.g. CFM, Bump, Vibration, Humidity, Temperature, Bounce, Operate Release time etc. and of course “Life Test”. We believe in high quality, cost effective and reliable solutions designed for an extensive range of applications, including IT and Telecom, Railways, Automation, Aviation Industries which are renowned internationally.

We have strength of about 200 skilled employees in our well equipped factory develop and produce fans, Pressure Switches and Relays with passionate enthusiasm, striving to create perfect application solutions for an extremely wide variety of industries. What is distinctive about **NEOTECH™** is that we not only mass-produce large product series in high quality, but also fulfill individual customer requests for professional applications.

Those who know us know that we demand the best of ourselves in setting worldwide benchmarks in innovation and close relationships with customers. Day after day, we work to achieve exemplary performance and be the proverbial “one step ahead” of the competition by virtue of our technologies, our superior skills and knowledge in respective product line.

We are indeed delighted to inform you that our entire range of “**NEOTECH™**” INSTRUMENT COOLING FANS” is “**CE**” approved.

We distribute our products through our dealer and distributor network in India. Our dealers are equipped with product brochures, technical data, promotional material, etc. We also support them with technical information as and when required for specialized applications.



## Price List W.E.F. 15<sup>th</sup> NOVEMBER 2021 AC AXIAL FAN

| MODEL NO.    | BEARING TYPE   | VOLTAGE | PRICE  | STD PACKING |
|--------------|----------------|---------|--------|-------------|
| J-22038 S1 H | SLEEVE BEARING | 110VAC  | 700.00 | 40          |
| J-22038 B1 H | BALL BEARING   | 110VAC  | 850.00 | 40          |
| J-22038 S2 H | SLEEVE BEARING | 230VAC  | 460.00 | 40          |
| J-22038 B2 H | BALL BEARING   | 230VAC  | 606.00 | 40          |
| J-22038 S24  | SLEEVE BEARING | 24VAC   | 905.00 | 40          |
| J-22038 B24  | BALL BEARING   | 24VAC   | 985.00 | 40          |

| MODEL NO.    | BEARING TYPE   | VOLTAGE | PRICE   | STD PACKING |
|--------------|----------------|---------|---------|-------------|
| J-17252 S1 H | SLEEVE BEARING | 110VAC  | 1380.00 | 24          |
| J-17252 B1 H | BALL BEARING   | 110VAC  | 1500.00 | 24          |
| J-17252 S2 H | SLEEVE BEARING | 230VAC  | 1100.00 | 24          |
| J-17252 B2 H | BALL BEARING   | 230VAC  | 1210.00 | 24          |

| MODEL NO.    | BEARING TYPE   | VOLTAGE | PRICE   | STD PACKING |
|--------------|----------------|---------|---------|-------------|
| J-17255 S1 H | SLEEVE BEARING | 110VAC  | 1380.00 | 24          |
| J-17255 B1 H | BALL BEARING   | 110VAC  | 1500.00 | 24          |
| J-17255 S2 H | SLEEVE BEARING | 230VAC  | 1100.00 | 24          |
| J-17255 B2 H | BALL BEARING   | 230VAC  | 1210.00 | 24          |

| MODEL NO.    | BEARING TYPE | VOLTAGE | PRICE   | STD PACKING |
|--------------|--------------|---------|---------|-------------|
| J-22060 S B1 | BALL BEARING | 110 VAC | 2430.00 | 12          |
| J-22060 S B2 | BALL BEARING | 230VAC  | 1844.00 | 12          |

| MODEL NO.    | BEARING TYPE | VOLTAGE | PRICE   | STD PACKING |
|--------------|--------------|---------|---------|-------------|
| J-22060 R B1 | BALL BEARING | 110 VAC | 2430.00 | 12          |
| J-22060 R B2 | BALL BEARING | 230VAC  | 1844.00 | 12          |

|                           |                |        |        |    |
|---------------------------|----------------|--------|--------|----|
| J-8025A240SH (80X80X25mm) | SLEEVE BEARING | 240VAC | 525.00 | 20 |
| J-9225A240SH (92X92X25mm) | SLEEVE BEARING | 240VAC | 535.00 | 20 |

## DC BRUSLESS FAN

| MODEL NO. | BEARING TYPE   | VOLTAGE | PRICE  | STD PACKING |
|-----------|----------------|---------|--------|-------------|
| 8025D12SH | SLEEVE BEARING | 12 VDC  | 235.00 | 50          |
| 8025D24SH | SLEEVE BEARING | 24 VDC  | 242.00 | 50          |

| MODEL NO. | BEARING TYPE   | VOLTAGE | PRICE  | STD PACKING |
|-----------|----------------|---------|--------|-------------|
| 9225D12SH | SLEEVE BEARING | 12 VDC  | 336.00 | 50          |
| 9225D24SH | SLEEVE BEARING | 24 VDC  | 346.00 | 50          |

| MODEL NO.  | BEARING TYPE   | VOLTAGE | PRICE  | STD PACKING |
|------------|----------------|---------|--------|-------------|
| 12038D12SH | SLEEVE BEARING | 12 VDC  | 540.00 | 40          |
| 12038D24SH | SLEEVE BEARING | 24 VDC  | 568.00 | 40          |
| 12038D48SH | SLEEVE BEARING | 48 VDC  | 588.00 | 40          |

| MODEL NO. | BEARING TYPE | VOLTAGE | PRICE   | STD PACKING |
|-----------|--------------|---------|---------|-------------|
| 1725D12BH | BALL BEARING | 12 VDC  | 3255.00 | 12          |
| 1725D24BH | BALL BEARING | 24 VDC  | 2890.00 | 12          |

4" FAN  
120 x 120 x 38 mm



6" OVAL FAN  
172 x 150 x 51 mm



6" SQUARE FAN  
172 x 172 x 55 mm



8" SQUARE FAN  
220 x 220 x 60 mm



8" ROUND FAN  
220 Ø x 60 mm



3" FAN  
80x80x25mm



3.5" FAN  
92x92x25mm

3" FAN  
80 x 80 x 25 mm



3.5" FAN  
92 x 92 x 25 mm



4" FAN  
120 x 120 x 38 mm



6" OVAL FAN  
172 x 150 x 51 mm






## PRICE LIST CUM TECHNICAL SPECIFICATION


|                              |                                                                                |
|------------------------------|--------------------------------------------------------------------------------|
| <b>Insulation Resistance</b> | : Min. 10M Ohm at 500 VDC between terminal & the frame.                        |
| <b>Operating Temp.</b>       | : Ball bearing : Within - 20-80°C. • Sleeve bearing : Within - 10-56°C         |
| <b>Life Expectancy</b>       | : Ball bearing : 50,000 hours at 60°C. • Sleeve bearing : 20,000 hours at 45°C |
| <b>Above Measurements</b>    | : At temp. Within 20-30°C. • At humidity 65% ±15%                              |

### DIMENSION

**4" FAN**  
120 x 120 x 38 mm

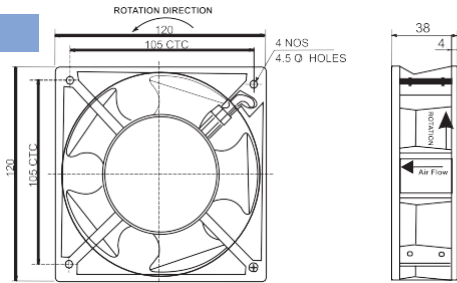


### AIR PERFORMANCE

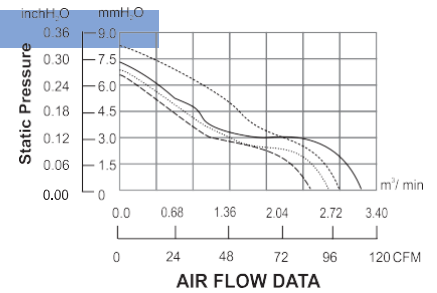


### DIMENSION

**6" OVAL FAN**  
172 x 150 x 51 mm

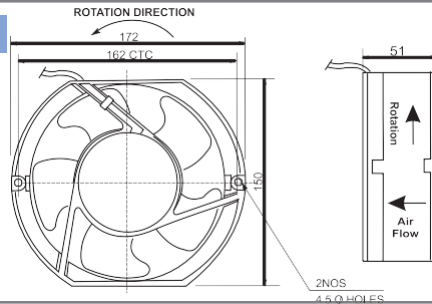


### AIR PERFORMANCE

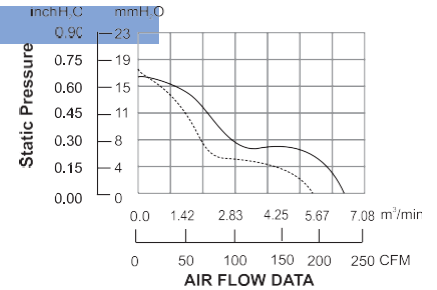


### DIMENSION

**6" SQUARE FAN**  
172 x 172 x 55 mm

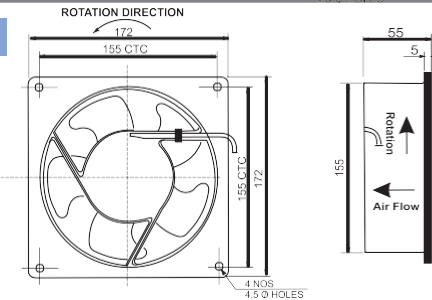


### AIR PERFORMANCE

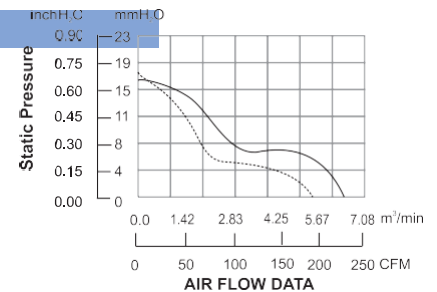


### DIMENSION

**8" SQUARE FAN**  
220 x 220 x 60 mm

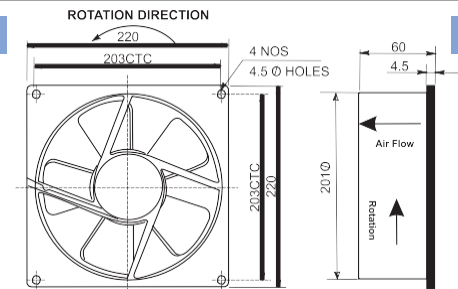


### AIR PERFORMANCE

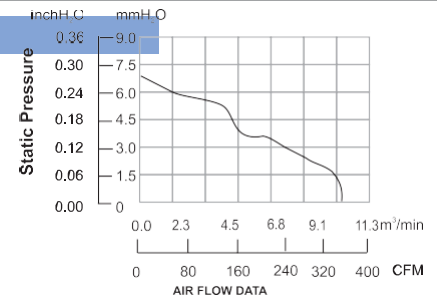


### DIMENSION

**8" ROUND FAN**  
220 Ø x 60 mm

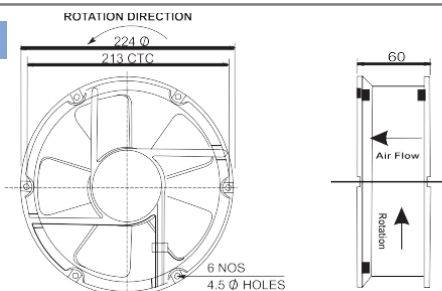

### AIR PERFORMANCE

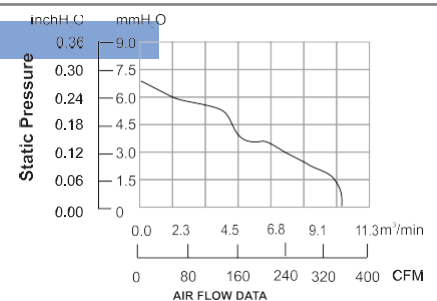

**ALL ABOVE DIMENSIONS ARE IN mm**

## PRESSURE SWITCHES FOR AIR COMPRESSORS

**APPLICATION** : Pressure switches, Types PS & PSV, are designed for automatically starting & stopping motors of Compressors & Pressurized water Plants.

**TYPES PS** : Type PS are triple pole Pressures switches without unloading valve.


**TYPE PSV** : Type PSV are Pressure switches Provided with an unloader valve which relieves the Pressure over the Compressors piston when the electric motor stops. Hence, when the compressor restarts, there is no gauge Pressure on the Compressors piston and as a result the electric motor life & Compressors life increase.

**HOW TO MOUNT** : The Pressure switches are designed for fitting to the air receiver by means connection (1/2"BSP). The stopping Pressure is set by turning the regulating nut (1) and starting Pressure, which depends on the differential, by turning the regulating screw (2).


**ADJUSTMENT** : Start the plant. when the stopping Pressure required is reached, turn the regulating nut (1) anti-clock wise until the plant stops.  
If the plant stops before the Pressure required is reached, the nut should be turned clock wise.  
Turning the regulating screw (2) anti-clock wise reduces the differential (increases the starting Pressure) While turning clock wise increases the Pressure) while turning it clock wise increases the differential Pressure.



## LINE DRAWING

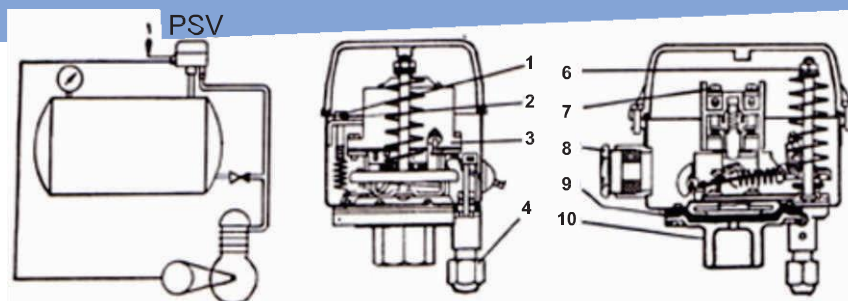

## CONNECTION DIAGRAMS

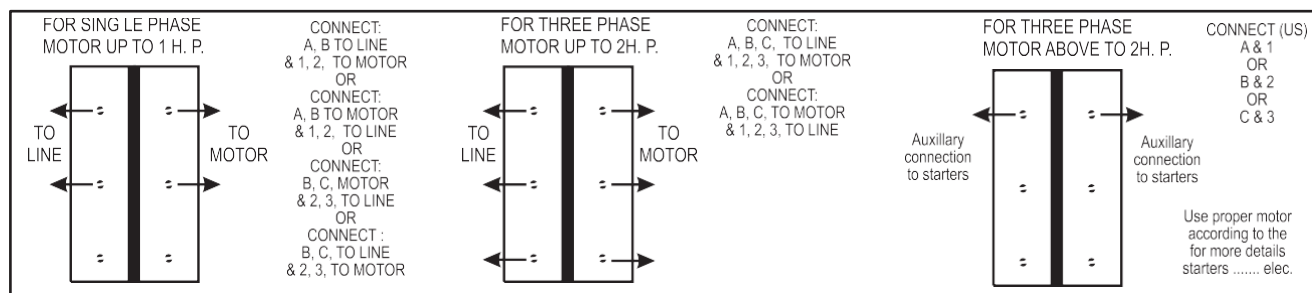

## PRICE LIST CUM ORDERING AND TECHNICAL DATA FOR PRESSURE SWITCHES

| TYPE    | RANGE                            | RATE   | DESCRIPTION                                 |
|---------|----------------------------------|--------|---------------------------------------------|
| PSV-15X | 7-15 Kg.<br>(100 - 213 PSIG)     | 1050/- | With Relief Valve & without On / Off Knob   |
| PS-15X  | 7-15 Kg.<br>(100 - 213 PSIG)     | 950/-  | Without Relief Valve & On / Off Knob        |
| PS-15B  | 7-15 Kg.<br>(100 - 213 PSIG)     | 1000/- | Without Relief Valve but with On / Off Knob |
| PSV-15B | 7-15 Kg.<br>(100 - 213 PSIG)     | 1070/- | With Relief Valve & On / Off Knob           |
| PSV-9B  | 2.5 - 9.5 Kg.<br>35.5 - 135 PSIG | 1070/- | With Relief Valve & On / Off Knob           |

| TYPE   | RANGE                            | RATE   | DESCRIPTION                                  |
|--------|----------------------------------|--------|----------------------------------------------|
| PS-9B  | 2.5 - 9.5 Kg.<br>35.5 - 135 PSIG | 1000/- | Without Relief Valve but With On / Off Knob  |
| PSV-9X | 2.5 - 9.5 Kg.<br>35.5 - 135 PSIG | 1050/- | With Relief Valve & without On / Off Knob    |
| PS-9X  | 2.5 - 9.5 Kg.<br>35.5 - 135 PSIG | 950/-  | Without Relief Valve & with On / Off Knob    |
| PS-4B  | 1 - 4 Kg.<br>(14 - 60 PSIG)      | 1000/- | Without Relief Valve but With On / Off Knob  |
| PS-4X  | 1 - 4 Kg.<br>(14 - 60 PSIG)      | 950/-  | Without Relief Valve & Without On / Off Knob |

| DESCRIPTION  | RATE / PCS | STD. PACK |
|--------------|------------|-----------|
| Daifarm      | 60/-       | 12 Nos.   |
| Relief Valve | 250/-      | -----     |

| DESCRIPTION      | RATE / PCS | STD. PACK |
|------------------|------------|-----------|
| Contact Block    | 525/-      | 25 Nos.   |
| Connection Plate | 150/-      | -----     |



**Office Address:** 14, Ground Floor,  
Tawawala Building, 36, Pathakwadi,  
Lohar Chawl, Mumbai – 400002  
**Contact No:** 9082463426 , 8169580098  
**Mobile No:** 9820825440, 9769789105  
**Landline:** 022-44517539 Talkfree : \*7213  
**Website:** [www.rujutaent.com](http://www.rujutaent.com)

---

- PRICES ARE EXCLUSIVE OF ALL TAXES & DUTIES
- WE RESERVE THE RIGHT TO CHANGE IN THE PRICE LIST
- ALL DISPUTES ARE SUBJECT TO MUMBAI JURISDICTION