

Rolycab

Authorised Distributor

Rujuta Corporation

Address: G-14B, Devkaran Mansion Compound, Ground Floor, Pathakwadi, Princess St., Mumbai-400002

Contact us: 9820825440 / 9082463426 / 9769789105 / 8169580098 / 022-39567213

Talkfee: *7213 Email us: rujutaent@gmail.com

Rolycab PVC Wiring Duct Price list

Size in mm (Height x Width)	Price Per Meter (In Rs.)	Standard Packing (1 Box =)
25 x 25	68.00	110
30 x 25	73.00	120
45 x 25	86.00	80
45 x 45	118.00	70
45 x 60	148.00	50
60 x 25	112.00	80
60 x 45	143.00	45
60 x 60	173.00	40
80 x 25	159.00	45
80 x 45	183.00	35
80 x 60	227.00	30
80 x 80	285.00	24
100 x 60	290.00	20
100 x 100	400.00	18
Duct/Channel Cutter	1800.00	1



UL94V-0
Flame Retardant




High Impact
Strength



High Dielectric
Strength



High Tensile
Strength




SS-2
STANDARD SLOT

SS-1
THIN SLOT

SS-3(New Design)
CLOSE TOP SLOT

UNSLOTTED

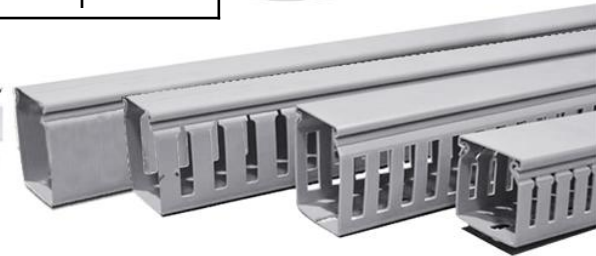

Ready stock

Ready stock

Make to Order

Make to Order



TECHNICAL SPECIFICATION:

- >Material Specification: High impact, Self Extinguishing, Rigid PVC Flame Retardant
- >Mechanical Specification: Tensile Strength- > 390kg/cm² / Impact Strength- > 7kgs.cm/cm
- >Electrical Properties: Di-electric Strength - 36kV/mm
- >Flammability: UL94-V0 > Color: Standard - Grey. Other Colors on request
- >Length: Standard - 1 meter ready stock. Other lengths on request.
- >Slot types: Standard - Thin & Wide. Close top slot & Unslotted on request.

OTHER SPECIFICATION & FEATURES:

- > Manufactured from specially compounded high-impact rigid PVC (Poly Vinyl Chloride).
- > Provided High Tensile & Compressive Strength.
- > Smooth corners and edges, so will not abrade wiring or irritate hands.
- > Unique cover design assures the duct cover will not slide once installed/during vibration.
- > Allows faster addition, fault tracing of wires and connection.
- > Highly durable, will not crack, peel or chip also resistant to oil, fungus and salt solutions.
- > High dielectric strength can withstand temperatures up to 60 degrees.
- > Provide complete electrical insulation.

Certification : CE Certified



Rolycab

Authorised Distributor

Rujuta Corporation

Address: G-14B, Devkaran Mansion Compound, Ground Floor,
Pathakwadi, Princess St., Mumbai-400002

Contact us: 9820825440 / 9082463426 / 9769789105 / 8169580098 / 022-39567213

Talkfee: *7213 Email us: rujutaent@gmail.com

Rolycab PVC Trunking Price list

Size in mm (Height x Width)	Price Per Meter (In Rs.)	Standard Packing (1 Box =)
25 x 16	55.00	100 x 2 Meters
38 x 25	110.00	80 x 2 Meters
50 x 25	120.00	60 x 2 Meters
50 x 50	182.00	50 x 2 Meters
75 x 50	330.00	30 x 2 Meters
75 x 75	400.00	24 x 2 Meters
100 x 50	460.00	12 x 2 Meters
100 x 100	620.00	18 x 2 Meters
Duct/Channel Cutter	1800.00	1



UL94V-0
Flame Retardant





High Impact
Strength



High Dielectric
Strength



High Tensile
Strength

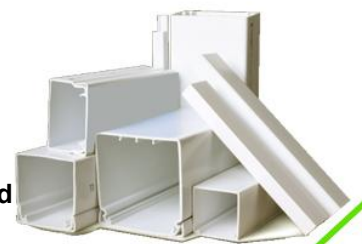

TECHNICAL SPECIFICATION:

- >Material Specification: High impact, Self Extinguishing, Rigid PVC Flame Retardant
- >Mechanical Specification: Tensile Strength- > 390kg/cm² / Impact Strength- > 7kgs.cm/cm
- >Electrical Properties: Di-electric Strength - 36kV/mm
- >Flammability: UL94-V0 > Color: Standard - White. Other Colors on request
- >Length: Standard - 2 meters.. Other lengths on request.
- >Slot types: Unslotted.

OTHER SPECIFICATION & FEATURES:

- > Manufactured from specially compounded high-impact rigid PVC (Poly Vinyl Chloride).
- > Provided High Tensile & Compressive Strength.
- > Smooth corners and edges, so will not abrade wiring or irritate hands.
- > Unique cover design assures the duct cover will not slide once installed/during vibration.
- > Allows faster addition, fault tracing of wires and connection.
- > Highly durable, will not crack, peel or chip also resistant to oil, fungus and salt solutions.
- > High dielectric strength can withstand temperatures up to 60 degrees.
- > Provide complete electrical insulation.

Certification : CE Certified

